



SpanSet®



01

Height Safety
Lifting
Load Control
Safety Management

SAVERLINE

SpanSet®



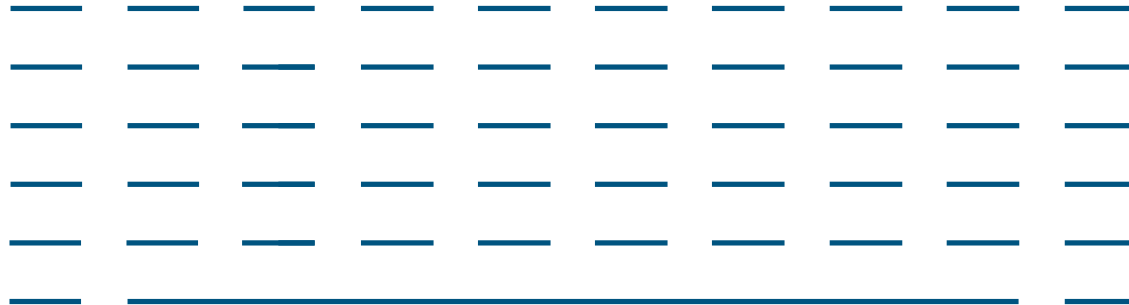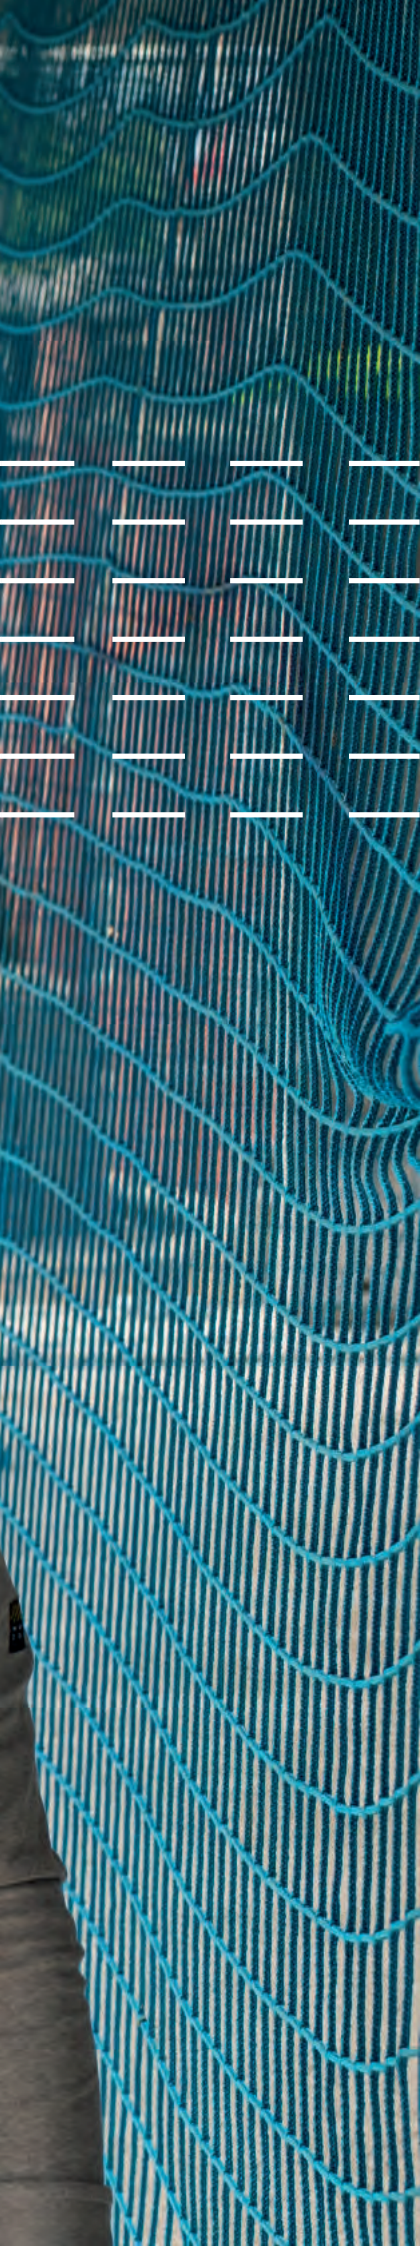

SpanSet – competence and passion for your safety


As one of the world's leading manufacturers of synthetic fibre lifting slings, load control ratchet systems, height safety harnesses and lanyards, SpanSet also takes the lead when it comes to self-retracting lifeline.

Our knowledge of height safety solutions extends from basic personal fall protection to permanent lifelines, confined space access, rescue systems and collective fall protection systems, such as guardrails, nets and tensioned access platforms.

SpanSet attribute the success of our products to our good listening skills when working in partnership with end users, our depth of experience in the many applications of our products and our policy of continual research and developments covering all applications.

All SpanSet products have been developed to work as part of an overall safety solution incorporating consultancy, design, supply, rental, installations, training, implementation, testing and servicing. By offering our customers an overall solution we are better able to meet the customers' needs and help them develop safer solutions for work at height.

SpanSet – Certified Safety

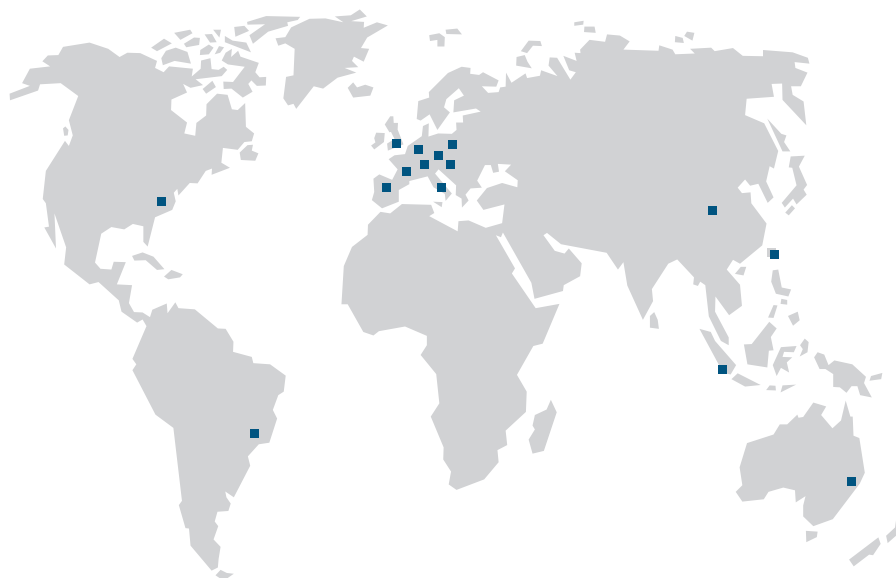



Saverline – How it works and what are your benefits


Saverline self retracting lifelines in accordance with EN 360:2002 are produced for maximum durability using outstanding technology for the demanding conditions of the workplace. All the components important for the safe functioning of the device are made from rustproof material, aluminum or stainless steel and shockproof plastic. This sturdy method of construction ensures that Saverline self retracting lifelines are always reliable in use and especially low-maintenance.

The Saverline self retracting lifelines are similar to a car safety belts in the way they work. A re-coiling spring keeps the lifeline taut allowing it to respond immediately in the event of a fall without a slack rope.

If the working speed (approx. 1.5 m/sec.) is exceeded, the catches which activate the brake system lock into place as a result of centrifugal forces. The energy absorption required for height-safety devices is attained via a new type of brake system (disk brake) which can only be set from the inside.

Arrest force values, which you can see on the diagram below, are independent of any weather situation or application and far below the 6 KN limit specified by the EN standard.

SpanSet – Certified Safety

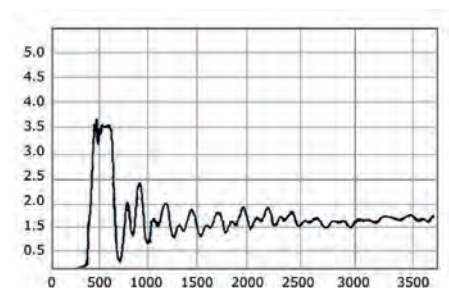



The name indicates what it stands for – a certified safe line for your daily work

All Saverline self retracting lifelines are constructed according to EN 360:2002 and have the requisite test approvals (CE 0299).

Saverline self retracting lifelines are used when working on high buildings, chimneys, roofs and at other workplaces involving a fall hazard. We also provide solutions for safety-relevant and problematic work areas (e.g. silos, shafts).

Saverline self retracting lifelines function in any location position and have been tested in a simulated fall trial over an edge.

Edge testing information



Requirements corresponding to the VG 11 Additional Testing guidance "Height-safety devices for horizontal use over a sharp edge"

To put things simply: Saverline self retracting lifelines fulfill this standard!

All Saverline self retracting lifelines are tested in accordance with the optional additional VG 11 'edge test' requirement. Saverlines unique webbing used in the self-retractable lanyards is just 2.5mm thick, 25 mm wide, with a breaking load of 34kN, a high-tech product developed by the SpanSet engineers. The webbing Saverline use has a Dyneema core – giving one of the highest performances of this type of fibre in this application.

In addition to Saverlines unique webbing used in their retractable type fall arresters, SpanSet have worked together with the manufacturer of the Galvanized Steel Cable used as lifelines in their devices to develop a test procedure to ensure the best performance of the Galvanized Steel Cable lifelines used in Saverline self retracting lifeline. Both Saverline's webbing and Galvanized Steel Cable lifelines used in the retractable type fall arresters, ensures the safety of the user during a fall over a sharp edge (r=0.5mm), for example a smooth steel edge or a rough concrete edge.

Saverline self retracting lifelines are certified in accordance with CE by the test and certification body of the "Personal Safety Equipment" technical committee. The functional capability of the height-safety devices is guaranteed by testing them in extreme situations (e.g. heat, cold, damp).

Saverline retractable type fall arresters are not only top quality German workmanship, they comply with the newest and toughest safety standards in the world!

List of the requirements for the EN 360:

- Design and ergonomics
- Materials and construction
- Blocking after pre-treatment
- Blocking in a horizontal position
- Static load bearing capacity
- Static load bearing capacity for horizontal applications
- Dynamic performance
- Dynamic performance for horizontal applications
- Dynamic load bearing capacity for horizontal applications
- Optional requirement in respect to fatigue strength
- Corrosion resistance Identification and information

Explanation for the device names

SRL = **S**elf **R**etracting **L**ifeline
 SRLR = **S**elf **R**etracting **L**ifeline **R**escue
 A = Aluminium Housing | P = Plastic Housing
 W = Webbing Lifeline | S = Steel Cable Lifeline |
 DR = Dyneema Rope | SS = Stainless Steel Cable
 Lifeline | SDE = Steel Double Action EN Karabiner
 STU = Steel Triple Action ANSI Anchor Karabiner
 ATA = Aluminium Triple Action Swivel Karabiner (EN)
 STA = Steel Triple Action Swivel Karabiner (ANSI)

Example:
 Safeline - SRL SDE P W 3.5 ATA means:
 Self Retracting Lifeline with a Steel Double
 Action EN Karabiner, Plastic Housing, a Webbing
 Lifeline and an Aluminium Triple Action Swivel
 Karabiner.

Approved for vertical and horizontal use



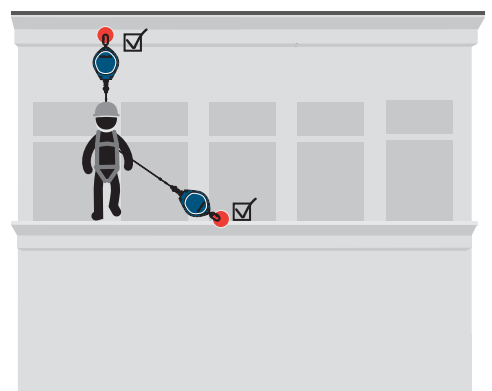


Diagram showing a dynamic test procedure:

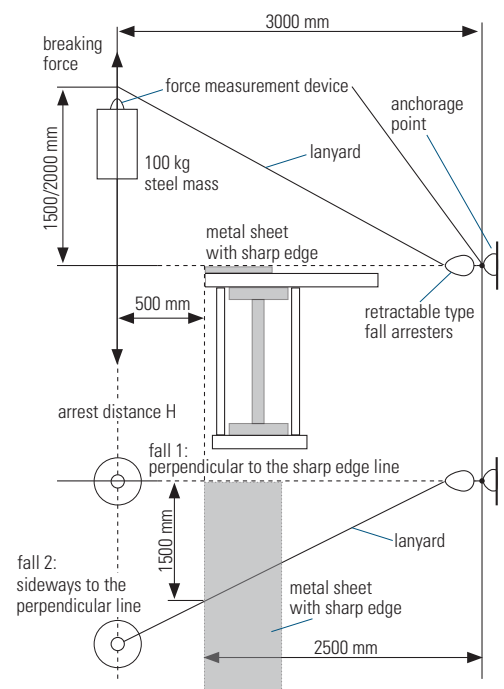

HEIGHT SAFETY

SAVERLINE

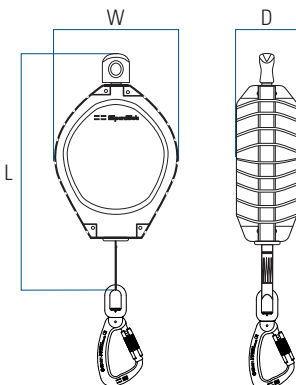

Saverline - SRL SDE A W 1.8 ATA

The Saverline - SRL SDE A W 1.8 ATA, aluminium housed fall arrest block, designed for fall protection in mobile elevated working platforms is a milestone in the area of personal protection against falls. Tested and certified according to the requirements of EN 360. However, in addition to this standard, this device has been tested and certified for protection in mobile elevated working platforms to a German standard. The lanyard is tested over a «double» sharp edge. Innovative technique in the area of internal energy absorbers ensure a maximum arresting force of less than 3kN at the anchorage point.

Lifeline Material	Polyester Webbing
Lifeline Length	1.8 m
Lifeline Width	19 mm
Attachment point	Swivel eye attachment point Ø 16 mm
Weight	0.7 kg
Capacity Load	136 kg
Dimensions (LxWxD)	237 x 78 x 60 mm (length «L» depending on connection)
Anchor Hook	2002256
Connection	2002205
Arrest Force	3 kN
Edge Tested	«double» CNB/P/11.060 (r = ≥ 0,5 mm)
Body Material (ext)	Aluminium
Chassis Material (int)	Aluminium
Certification	EN 360:2002, DIN 19427:2017
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL SDE P W 7 ATA

Global Item Number	2002106
EAN Code	7610726105335
Package Contents	Manual with SpanSet-Design



Saverline - SRL SDE P W 3.5 ATA

The Saverline - SRL SDE P W 3.5 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Polyester Webbing
Lifeline Length	3.5 m
Lifeline Width	25 mm
Attachment point	Swivel eye attachment point $\varnothing 16\text{ mm}$
Weight	1.2 kg
Capacity Load	136 kg
Dimensions (L x W x D)	326 x 104 x 78 mm
Anchor Hook	2002256
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL SDE P W 3.5 ATA

Global Item Number	2002108
EAN Code	7610726103980
Package Contents	Manual with SpanSet-Design

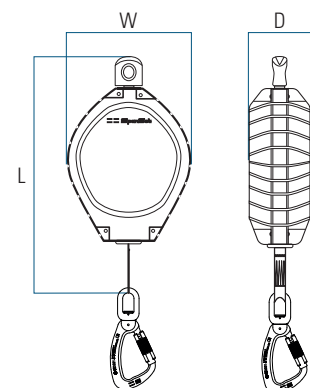

HEIGHT SAFETY

SAVERLINE




Saverline - SRL SDE P W 7 ATA

The Saverline - SRL SDE P W 7 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Polyester Webbing
Lifeline Length	7 m
Lifeline Width	25 mm
Attachment point	Swivel eye attachment point $\varnothing 16\text{ mm}$
Weight	1.8 kg
Capacity Load	136 kg
Dimensions (L x W x D)	300 x 165 x 80 mm
Anchor Hook	2002256
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available

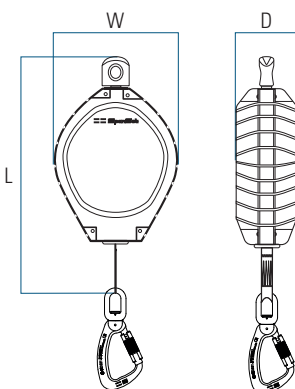

Saverline - SRL SDE P W 7 ATA

Global Item Number	2002110
EAN Code	7610726104000
Package Contents	Manual with SpanSet-Design



Saverline - SRL SDE P W 12 ATA

The Saverline - SRL SDE P W 12 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Polyester Webbing
Lifeline Length	12 m
Lifeline Width	25 mm
Attachment point	Swivel eye attachment point $\varnothing 16\text{ mm}$
Weight	3.4 kg
Capacity Load	136 kg
Dimensions (L x W x D)	370 x 195 x 95 mm
Anchor Hook	2002256
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL SDE P W 12 ATA

Global Item Number	2002112
EAN Code	7610726104208
Package Contents	Manual with SpanSet-Design

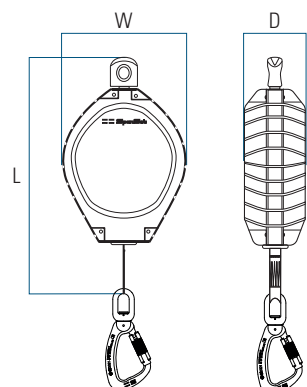

HEIGHT SAFETY

SAVERLINE



Saverline - SRL SDE P S 3 ATA

The Saverline - SRL SDE P S 3 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a steel rope. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Galvanised Steel Cable
Lifeline Length	3 m
Lifeline Width	$\varnothing 4.8\text{ mm}$
Attachment point	Swivel eye attachment point $\varnothing 16\text{ mm}$
Weight	1.9 kg
Capacity Load	136 kg
Dimensions (L x W x D)	390 x 104 x 78 mm
Anchor Hook	2002256
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL SDE P S 3 ATA

Global Item Number	2002107
EAN Code	7610726103973
Package Contents	Manual with SpanSet-Design

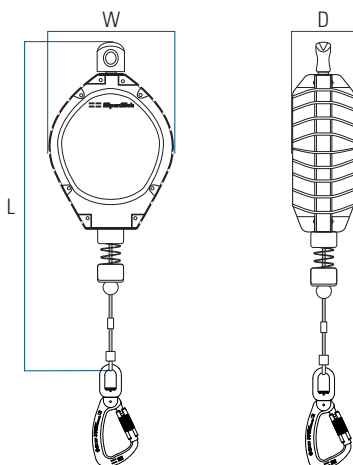



Saverline - SRL SDE P S 6 ATA

The Saverline - SRL SDE P S 6 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a steelrope. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Galvanised Steel Cable
Lifeline Length	6 m
Lifeline Width	$\varnothing 4.8\text{ mm}$
Attachment point	Swivel eye attachment point $\varnothing 16\text{ mm}$
Weight	2.5 kg
Capacity Load	136 kg
Dimensions (L x W x D)	420 x 145 x 80 mm
Anchor Hook	2002256
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL SDE P W 6 ATA

Global Item Number	2002109
EAN Code	7610726103997
Package Contents	Manual with SpanSet-Design

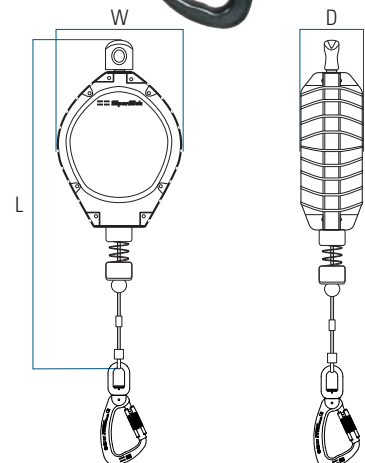

HEIGHT SAFETY

SAVERLINE



Saverline - SRL SDE P S 12 ATA

The Saverline - SRL SDE P S 12 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a steel rope. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Galvanised Steel Cable
Lifeline Length	12 m
Lifeline Width	$\varnothing 4.8\text{ mm}$
Attachment point	Swivel eye attachment point $\varnothing 16\text{ mm}$
Weight	4.9 kg
Capacity Load	136 kg
Dimensions (L x W x D)	500 x 195 x 95 mm
Anchor Hook	2002256
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL SDE P S 12 ATA

Global Item Number	2002111
EAN Code	7610726104109
Package Contents	Manual with SpanSet-Design

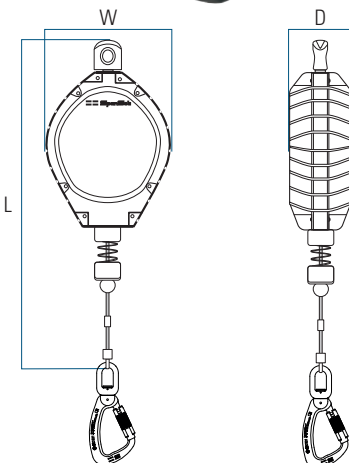



Saverline - SRL STU A S 18 ATA

The Saverline - SRL AS Series, aluminium housed fall arrest block is a sturdy, low maintenance device fitted with a steel rope. The attachment anchorage point on the fall arrest block is an open steel handle, suitable for connection via a Large Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Galvanised Steel Cable
Lifeline Length	18 m
Lifeline Width	Ø 4.8 mm
Attachment point	Steel Handle
Weight	9.5 kg
Capacity Load	136 kg
Dimensions (L x W x D)	550 x 240 x 100 mm
Anchor Hook	2002459
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 (r = ≥ 0,5 mm) + ANSI/ASSE Z 359.14-2014 (r = ≥ 0,13 mm)
Body Material (ext)	Aluminium
Chassis Material (int)	Stainless Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available



Saverline - SRL STU A S 18 ATA

Global Item Number	2002362
EAN Code	7610726104307
Package Contents	Manual with SpanSet-Design

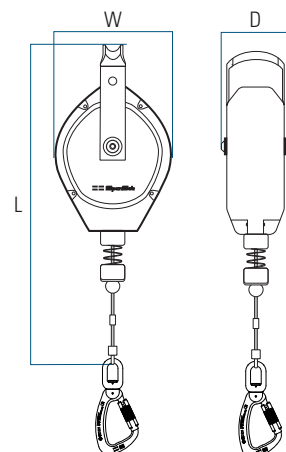

HEIGHT SAFETY

SAVERLINE



Saverline - SRLR A S 12 STA

The Saverline - SRLR AS12, aluminium housed fall arrest block with Rescue / Recovery is a sturdy, low maintenance device fitted with a steel rope. The attachment anchorage point on the SRLR STU A S12 STA is an open steel handle. When a person suffers an accident such as loss of consciousness, they need to be rescued quickly and safely. The inbuilt inertia wheel recovery mechanism can be engaged by pulling the pin on the side of the block and engaging a winding handle. This then allows the device to be used to lift or to lower the casualty to safety and can be used as a retracting device to pull the person back up to safety. Alternatively, a second person can be clipped-in to ascent into the shaft to rescue the injured person.


Lifeline Length	12 m
Lifeline Width	Ø 4.8 mm
Attachment point	Steel Handle
Weight	7 kg
Capacity Load	136 kg
Dimensions (L x W x D)	450 x 195 x 180 mm
Anchor Hook	No anchor hook needed
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	Not suitable for use over a leading edge and has not been edge tested
Body Material (ext)	Aluminium
Chassis Material (int)	Stainless Steel
Certification	EN 360, EN 1496, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available

Please note: The winch is only for rescue. For general hoisting purposes with material loads, or with persons, winches are needed with dedicated certifications.

Saverline - SRLR STU A S 12 STA

Global Item Number	2002363
EAN Code	7610726104406
Package Contents	Manual with SpanSet-Design

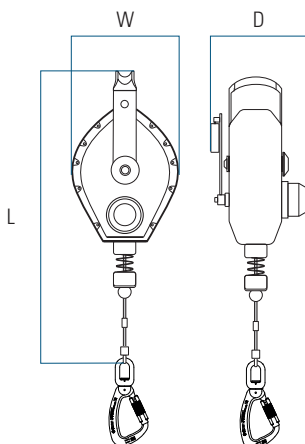

HEIGHT SAFETY

SAVERLINE




Saverline - SRLR AS Series


The Saverline - SRLR AS, aluminium housed fall arrest block with Rescue / Recover is available in different lengths. For general information, please see page 15. Please note: The winch is only for rescue. For general hoisting purposes with material loads, or with persons, winches are needed with dedicated certifications.

Part Number	Lifeline Length	Weight	Dimensions (L x W x D)	Global Item Number	EAN Code
SRLR A S 18 STA	18 m	11,5 kg	570 x 240 x 200 mm	2002380	7610726104758
SRLR A S 24 STA	24 m	16 kg	630 x 275 x 220 mm	2002381	7610726104765
SRLR A S 30 STA	30 m	21 kg	640 x 315 x 230 mm	2002382	7610726104772
SRLR A S 42 STA	42 m	40 kg	740 x 370 x 235 mm	2002383	7610726104789
SRLR A S 65 STA	65 m	780 x 390 x 240 mm	2002384	7610726104796	



Saverline SRLR A S 65 STA

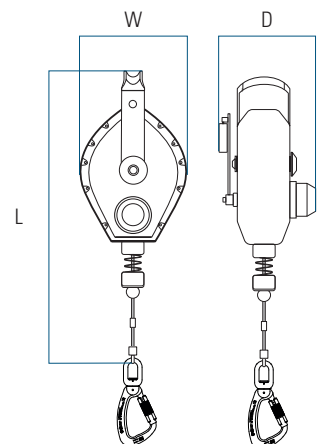

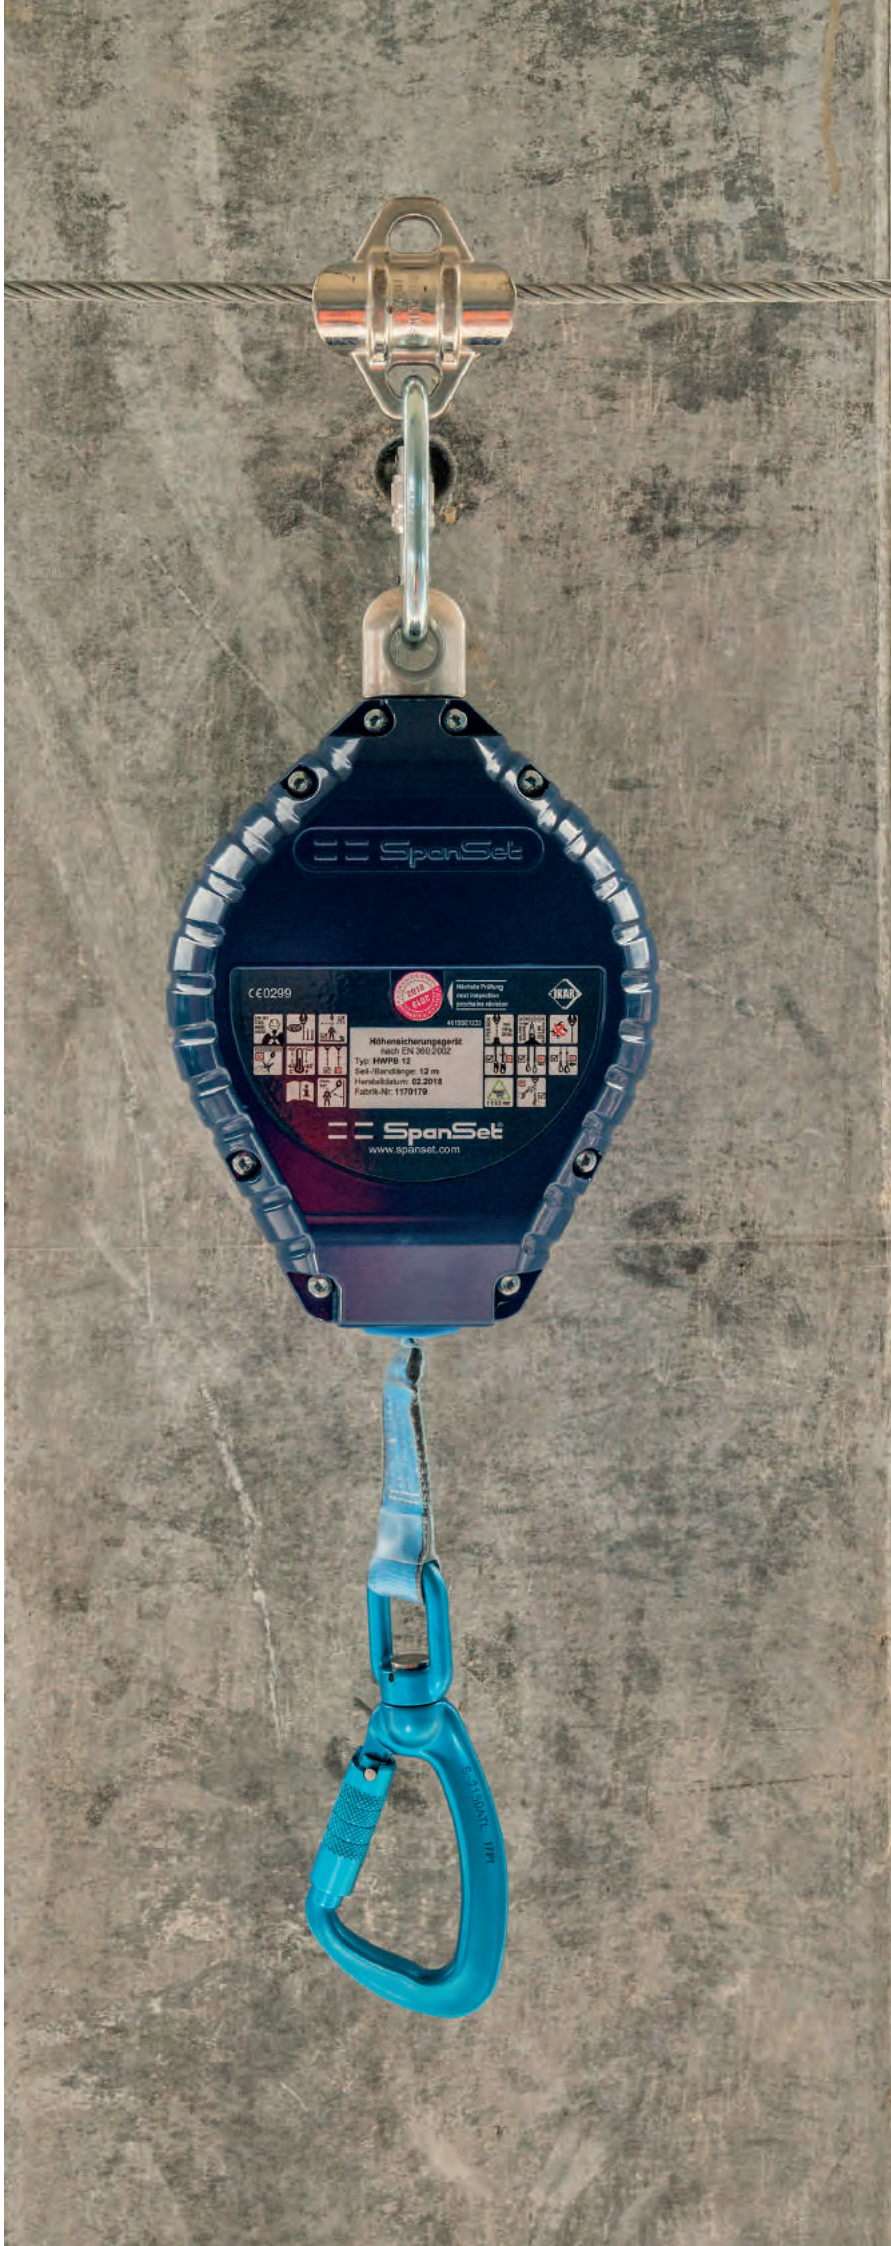


Meeting standards is good – Setting standards is better

We are quite proud of our achievements. After all, they have contributed to safer and easier working conditions around the world – and thus to fewer accidents and lower operating costs. We were especially glad to hear the story of a policeman, who during a truck check replaced his official severity with a friendly smile after seeing that the cargo was secured with our products.

The SpanSet brand stands for something. Not only for meeting international safety standards, but for raising them again and again. For example, the new EU lashing standard would not exist without our lashing belts. This is exactly what we stand for with our products, services and consultancy: for more security than is demanded today – namely, as much as is possible tomorrow. That is our goal, that is our job and that is our passion. So that those who work with SpanSet can also trust in it in the future – just like the police.

SpanSet – Certified Safety

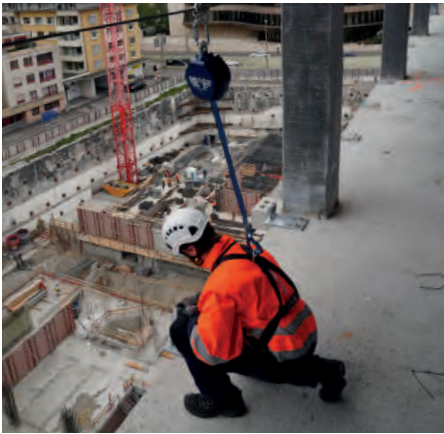

We can deliver everything out of one hand and give extensive consultancy and explanation about Height Safety, Lifting and Load Control

Height Safety

When working in heights, safety is vital – and SpanSet gives you this safety. With suitable, practical solutions that we specially develop and produce for you. Our sophisticated protective equipment and securing systems are easy to operate, comfortable to wear and guarantee optimal freedom of movement. For safe, concentrated and efficient work at any height.

We can offer you a wide range of:

- Harnesses
- Lanyards
- Anchorages
- Solutions for working in confined space
- Fall Arrest and Recovery Blocks
- Horizontal Lifelines
- Safety Lines
- Height Safety Kits
- Collective Measures

Lifting

Whatever you lift has to stay at the top. Our extremely hard-wearing round slings and webbing slings see to that. Decades of experience and solid quality craftsmanship stand behind these high-end textile products. Those who lift loads in cooperation with SpanSet put their trust in maximum safety and minimum time and effort.

We can offer you a wide range of:

- Roundslings
- Webslings
- Protective sleeves against sharp edges
- Joker Hooks
- Lifting Points ExoSet
- Lifting Chains
- Wire Ropes
- Lifting Beams

Load Control

Those who transport loads both large and small want to make sure they arrive safely. Our products and systems for securing loads master this task reliably, and we are always on par when international standards are set. With our cutting-edge tool, the SpanSet Lashing Calculator, we make it easier for you to calculate the required lashing equipment, thereby giving you added safety and economic efficiency. Our high production quality guarantees that everything stays where it belongs, even in critical situations and under special demands. And the solutions that we develop in close cooperation with our valued customers have the same centimetre accuracy.

We can offer you a wide range of:

- Heavy Duty Ratchet Lashing Straps 75 mm
- Medium Duty Ratchet Lashing Straps 50 mm
- Light Duty Ratchet Lashing Straps 25 mm
- Abrasion Protection
- Edge Protectors
- Anti Slip Products
- Lashing Points

Safety Management

For us, safety already begins early on. For example, when we advise your experts in the construction of machines that will later be transported and hoisted with SpanSet products. By providing our expertise from the beginning, we can work with you to achieve maximum work safety – including everything from special designs to inspection services to repairs. As a professional partner for safety management, we also enhance your competencies in hoisting technology, load securing and fall protection with a broad programme of seminars and training courses. Our goal is to make your work processes easier, safer and more economical. For this reason, we are there to support and advise you at all times.



SpanSet®

SpanSet Limited

Telford Way, Middlewich

Cheshire CW10 0HX, UK

Tel: +44 (0) 1606 737494

Fax +44 (0) 1606 737502

www.spanset.co.uk

Subject to technical alterations. All rights reserved. No part of this catalogue may be reproduced or processed, duplicated or distributed using electronic systems in any form (print, photocopy, microfilm or any other procedure) without the written approval of the SpanSet company. This catalogue has been prepared with all due care; SpanSet accepts no liability for errors or omissions.