


PRODUCT DATA SHEET FOR

WALER END BEARERS

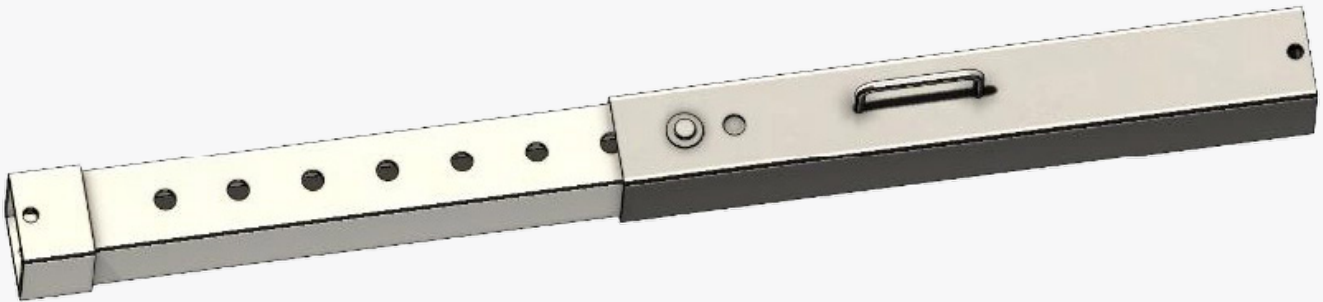

Steel End Bearers are used to provide support at the end on the Waler Rails when it is not possible to safely batter the ends of the trench to ground level.

They are manufactured in several sizes to match the selection of Rams. The End Bearers are supplied with securing pin (Part No. MT-B0023) and 'R' clip (Part No. MT-H0030).

An over extension mechanism is employed to prevent the inner section being extended beyond its safe limit. The simple telescopic construction is from two box sections: the outer sleeve made from 100x100x4 SHS – S355 and the inner sleeve made from 90x90x5 SHS – S355.

All End Bearers for ram types B and C have carrying handles. These MUST NOT be used for lifting the assembled frame; they are solely to be used for carrying the End Bearer. The securing pin is to ensure safe handling of the End Bearer when being transported and MUST be removed when assembled with the waler rails, otherwise when pumping out the rams, the pin can become under load and prevent the rams achieving the desired loading on the trench sheets.

Part No.	For Ram Type	Range	Weight
MT-B0020	A	530mm to 860mm	13.5kg
MT-B0021	B	780mm to 1310mm	20.0kg
MT-B0037	B1	1175mm to 1705mm	25.0kg
MT-B0022	C	1260mm to 2010mm	30.5kg
MT-B0030	B1N	1295mm to 1825mm	29.0kg
MT-B0026	B2	1500mm to 2030mm	31.5kg
MT-B0028	B3	1700mm to 2230mm	32.5kg
MT-B0031	B2N	1795mm to 2325mm	26.5kg
MT-B0032	C1	1960mm to 2710mm	39.0kg
MT-B0033	C2	2650mm to 3400mm	47.5kg

